

MAGella®-Series

Magnetic flux filter

MAGella® MG100

MAGella® MG200





Description

The MAGella MG100 and MG 200 magnetite filters remove all types of impurities that usually occur in heating systems. They protect the boiler and help maintain optimal operation and efficiency of the system.

Circulating impurities in heating systems can cause wear and premature failure of pumps, valves and heat exchangers. The MAGella MG100/MG200, mounted on the return line on the boiler, protects the system from all types of impurities. These filters are particularly suitable for systems with limited space.

MAGella filters use a unique magnetic core to achieve maximum contact time between the circulating impurities and the powerful neodymium-iron-boron magnets. The MAGella core reduces the water flow rate and turbulence within the unit to improve contaminant retention. It also ensures that the filter remains clog-free. The separated contaminants can be easily flushed out of the unit by removing the magnet from its collar and opening the drain valve on the bottom of the filter.

Technical data

MAGella®	MG100	MG200
Item no.	MAG-100150	MAG-100160
Connections	with 3/4" IT	with 1" IT
Dimensions	205/76 mm (height/width)	228/88 mm (height/width)
Field strength	9,000 Gauß	9,000 Gauß
Max. Flow rate	32 l/min	50 l/min
Max. Temperature	100 °C	100 °C
Max. operating pressure	3 bar	3 bar
Mounting	Mount main unit upright only - Align flow with direction arrow	Mount main unit upright only - Align flow with direction arrow
Weight	1.3 kg (without packaging, incl. ball valve)	1.3 kg (without packaging, incl. ball valve)
Insulation Item no.	MAG-100151 √ Available separately	MAG-100161 √ Available separately

Safety instructions



ATTENTION:

MAGella filters contain strong magnets. Stay away from electrical appliances, bank cards and other magnetic devices.



MAGella filters contain strong magnets. Handle with care if you are a pacemaker wearer.





MAGella filters are pressurised devices. The pressure must be released before any maintenance.




The units can become hot during normal operation. Please handle with care.

Pressure loss curves

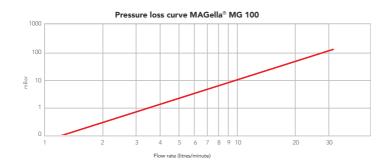


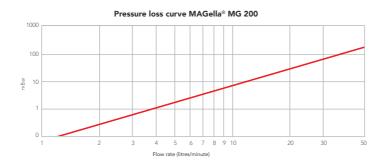


Installation

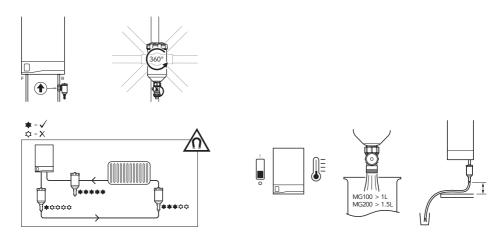


Dimensions

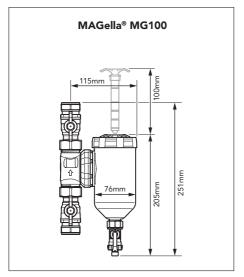


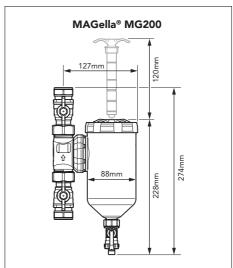



Installation instructions

















Maintenance























our water. safe.

YOUR CONTACT PERSON:



Technical changes and innovations are reserved. Images may vary, UWS Technologie GmbH assumes no liability for the accuracy of technical formation. Liability is excluded. Reproduction and distribution to third parties only with the express permission of UWS Technologie GmbH.